

**(BK) GPH, GPH Plus, DPH**



**(BK) Changing Groups:** Press #, the group number, ENT

**(BK) Adding/Deleting Scan List Channels (scan/pri must be off)**

“ENT” to add channel to Scan  
“CLR” to delete channel to Scan List  
Turn Scan on/off

Toggle SCN and PRI on (turn both on at the same time)

**(BK) KEYPAD LOCKS:** When SCAN and PRI are on, keypad is locked  
Pressing FCN locks the keypad on some radios

**(BK) GPH CMD**



**GPH, GPH+, DPH**

TONE Select (SCN and PRI must be off).  
Press the number corresponding to the required tone.

**IMPORTANT (GPH, GPH+, DPH):**

The tone must be selected EACH time a channel is changed (for channels that require a tone).



**(BK) CG-SQ Knob**

Turning this CCW until clicks tone (password) protects the radio – do not use in this position. Rotate knob until static is heard and then back if off slightly.

**GPH-CMD, Kenwood**


TONE Select (SCN and PRI must be off). Press the number corresponding to the required tone.

**IMPORTANT (GPH-CMD and Kenwood)**

You can only select tones on channels that have more than one tone – channels with single tone access are locked.

**Group Up/Down**

SCANNING – SCN: Turns Scan on/off  
MON: Monitors without tones  
DIM: Dims display

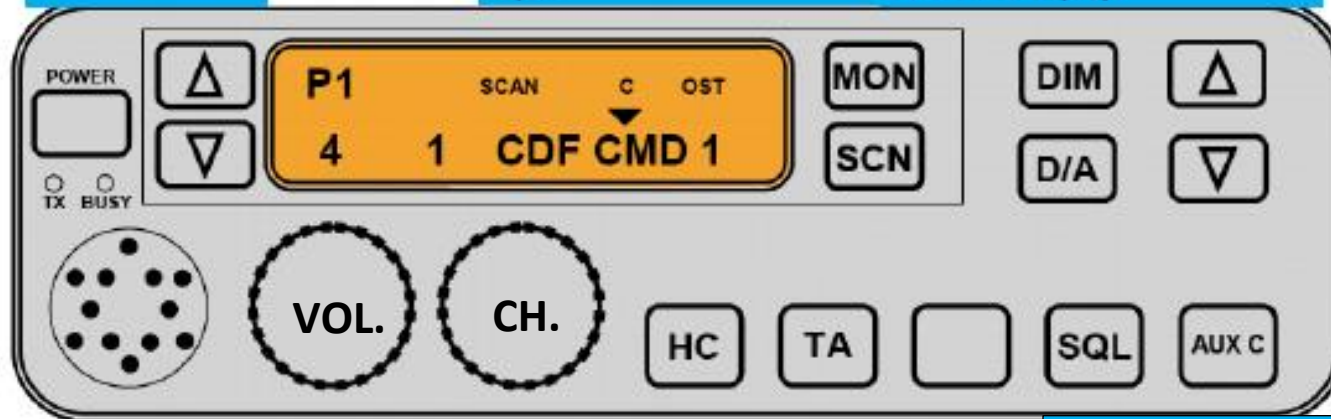

**Tone Select Up/Down**

**AUX C (select command group channels)**

**GPH-CMD, Kenwood**

COMMAND GROUP  
The GPH-CMD and Kenwood can build a command group.  
GPH-CMD  
\* to add chan. to cmd group  
## to go to cmd group  
When in cmd grp, \* to delete


Kenwood  
AUX C add/del fm cmd group  
Group up/down to cmd group

**HC – Home Channel**

**TA – Talk Around**

**SQL – Squelch**

Adjust w/ CH knob

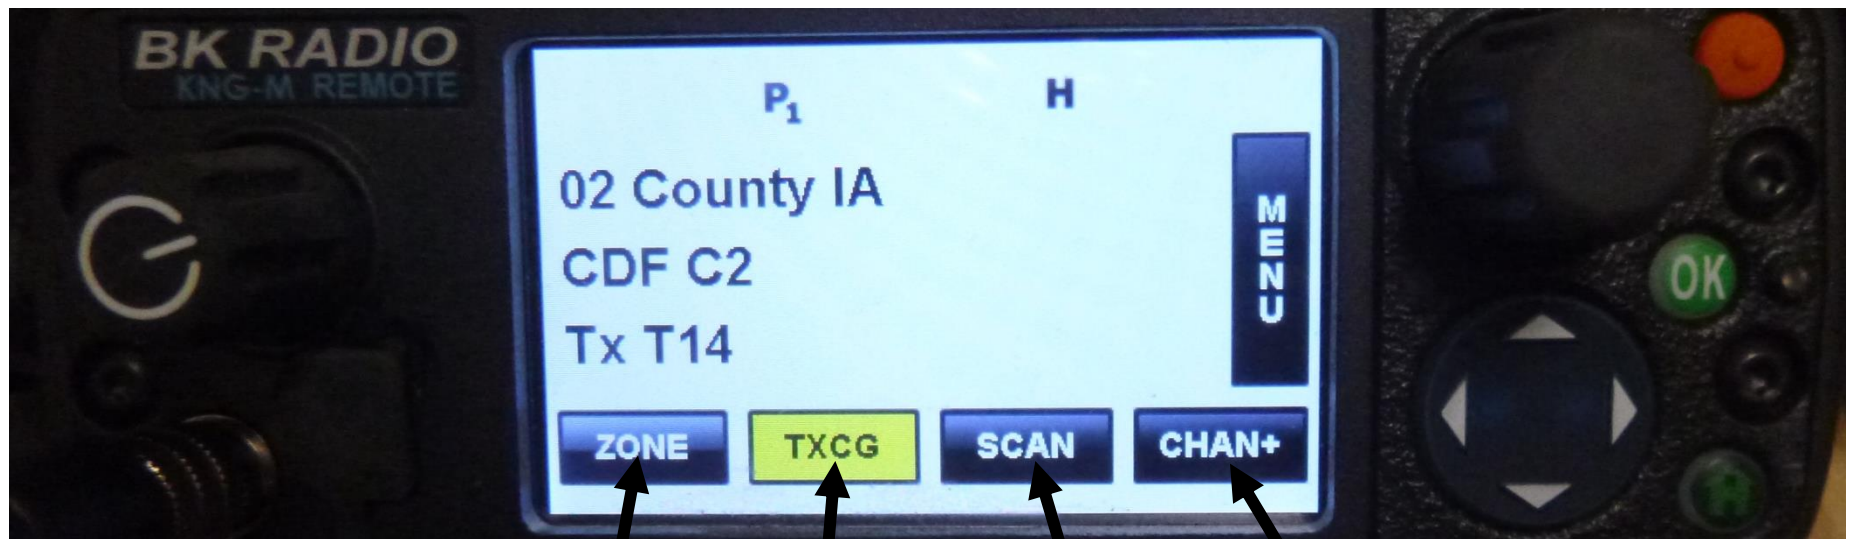

To Change  
Groups

Changes  
Tones

Turns Scan  
On/Off

Adds Channel  
to CMD Group

To change **Groups** or **Tones**  
select from drop down menu  
then press OK or Enter

When adding Channels to CMD Group will default to CMD Group 1  
You will need to assign a channel #, defaults to 1  
Get to CMD Group by using the "Zone" button, (Group 26)  
Once in CMD Group you need to build a Scan List for that group

Use the MENU button and associated drop down menus to

- Create a Scan List
- Enable or Disable Monitor Mode
  - Adjust Squelch
  - Enable Talk Around