

**(BK) GPH, GPH Plus, DPH**



**(BK) Changing Groups:** Press #, the group number, ENT

**(BK) Adding/Deleting Scan List Channels (scan/pri must be off)**

“ENT” to add channel to Scan  
“CLR” to delete channel to Scan List

**Turn Scan on/off**

Toggle SCN and PRI on (turn both on at the same time)

**(BK) KEYPAD LOCKS:** When SCAN and PRI are on, keypad is locked  
Pressing **FCN** locks the keypad on some radios

**(BK) GPH CMD**



**GPH, GPH+, DPH**

**TONE Select** (SCN and PRI must be off).  
Press the number corresponding to the required tone.

**IMPORTANT (GPH, GPH+, DPH):**

The tone must be selected **EACH** time a channel is changed (for channels that require a tone).



**(BK) CG-SQ Knob**

Turning this CCW until clicks tone (password) protects the radio – do not use in this position. Rotate knob until static is heard and then back if off slightly.

**GPH-CMD, Kenwood**

**TONE Select** (SCN and PRI must be off). Press the number corresponding to the required tone.


**IMPORTANT (GPH-CMD and Kenwood)**

You can only select tones on channels that have more than one tone – channels with single tone access are locked.

**Group Up/Down**

**SCANNING – SCN:** Turns Scan on/off  
**D/A:** deletes/adds channel to scan list

**MON:** Monitors without tones  
**DIM:** Dims display

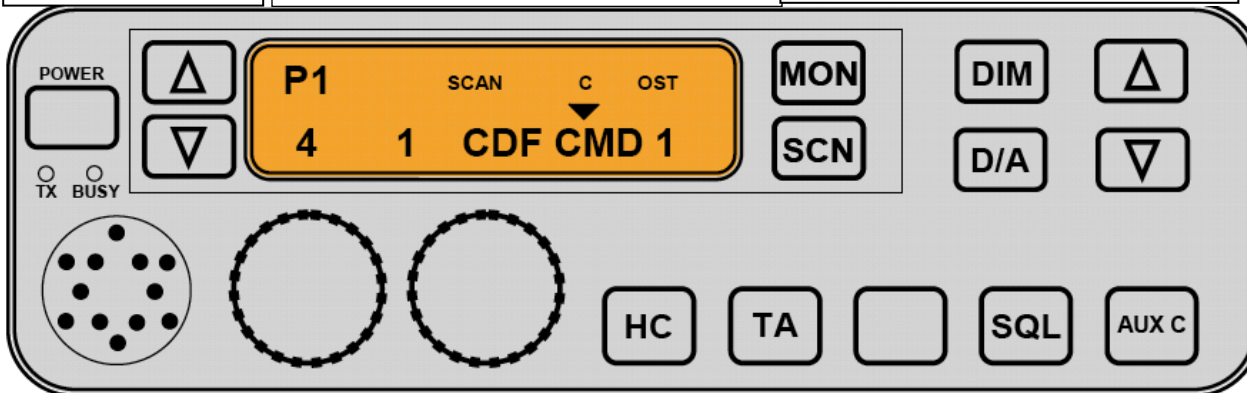

**Tone Select Up/Down**

**AUX C (select command group channels)**

**GPH-CMD, Kenwood COMMAND GROUP**

The GPH-CMD and Kenwood can build a command group.  
**GPH-CMD**  
\* to add chan. to cmd group  
## to go to cmd group  
When in cmd grp, \* to delete

**Kenwood AUX C add/del from cmd group**

**HC – Home Channel (MVU)**

**TA – Talk Around (Direct)**

**SQL – Press for squelch and adjust**

**Group up/down to cmd group**

